


Floor Concealed Type



Compact Design Fitting Into a Tiny Space

The design places special emphasis on the compatibility with the interior design as well as space saving design, allowing it to fit perfectly into the space below a bay window. So compact that it fits into even a tiny space.

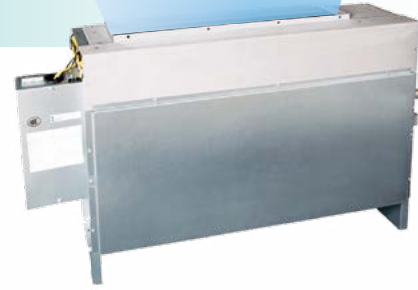

Perfectly Fit The Indoor Decoration

No matter what kind of decoration style it is, Hisense floor concealed type can be able to match it.



Two-level Static Pressure Available

High static pressure achieves long distance air exhaust. The air can be reach to every part of the room.



Hidden Installation, Space Saving

Hisense floor concealed type can be installed in the decoration space, which is covered by the decoration.

Indoor unit	Floor Concealed Type				
Model Power Supply	AC1Φ, 220~240V/50Hz	AVH-09UXCSAA	AVH-14UXCSAA	AVH-18UXCSBA	AVH-24UXCSBA
	AC1Φ, 220V/60Hz	AVH-09UX2SAA	AVH-14UX2SAA	AVH-18UX2SBA	AVH-24UX2SBA
Nominal Cooling Capacity	kW	2.8	4.3	5.6	7.1
	kcal/h	2,400	3,700	4,800	6,100
	Btu/h	9,600	14,700	19,100	24,200
	kW	3.3	4.9	6.5	8.5
Nominal Heating Capacity	kcal/h	2,800	4,200	5,600	7,300
	Btu/h	11,300	16,700	22,200	29,000
Noise Level (H/M/L)	dB(A)	34-31-27	40-36-34	41-36-32	44-40-36
Cabinet Color	Silky White				
Outer Dimensions	H	mm	620	620	620
	W	mm	948+139	948+139	1,218+139
	D	mm	202	202	202
Net Weight	kg	18	22	26	27
Air Flow Rate (H/M/L)	m ³ /h	510/450/380	620/540/480	890/740/630	980/830/710
Motor Power	W	50	80	90	120
Piping Connections	Flare-nut Connection(with Flare Nuts)				
Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ9.53
Gas Line	mm	Φ12.7	Φ12.7	Φ15.88	Φ15.88
Condensate Drain		VP25	VP25	VP25	VP25
Packing Volume	m ³	0.19	0.19	0.23	0.23

NOTES:

1.The nominal cooling capacity and heating capacity are based on following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB(80°F DB), 19.0°C WB(66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB(95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB(68°F DB)
Outdoor Air Inlet Temperature: 7°C DB(45°F DB), 6°C WB(43°F WB)


2.The sound pressure level is based on following conditions:
1.5m meters from the unit and 1.5m meters from floor level.
The above data was measured in an anechoic chamber so that reflected sound should be taken into consideration in the field.

Console Type



New Appearance Design

The unit adopts the fashionable appearance with suspension flat design and realizes digital display function.



The Unit Can Be Controlled Automatically Through The Hi-Motion (Optional).

This function can be achieved by the wired controller: HYXE-J01H, HYXM-VB01



Humidity Sensor Achieves The Automatic Dehumidification (Optional).

This function can be achieved by the wired controller: HYXE-J01H, HYXE-VA01, HYXM-VB01, HYXE-M01H



High Efficiency and More Options

DC Fan motor realizes high efficiency with 6 air flow speed adjustments to provide more options for customers.



*The wireless remote controller HYE-W01 is standard for Console Type.

Indoor unit	Console Type						
Model Power Supply	AC 1Φ, 220~240V/50Hz (60Hz)	AVK-05HJFCAA	AVK-07HJFCAA	AVK-09HJFCAA	AVK-12HJFCAA	AVK-15HJFCAA	AVK-17HJFCAA
Nominal Cooling Capacity	kW	1.5	2.2	2.8	3.6	4.5	5.0
	kcal/h	1,300	1,900	2,400	3,100	3,800	4,300
	Btu/h	5,100	7,500	9,600	12,300	15,300	17,000
	kW	2.0	2.5	3.3	4.2	5.0	5.6
Nominal Heating Capacity	kcal/h	1,700	2,100	2,800	3,600	4,300	4,800
	Btu/h	6,800	8,500	11,200	14,300	17,000	19,100
Noise Level (HH2/HH1/Hi/Me/Lo/Slo)	dB(A)	32/30/29/28/26/24	34/32/31/29/27/26	36/35/32/31/29/27	39/36/34/31/29/27	41/39/37/35/33/32	44/43/41/39/37/36
Outer Dimensions	H	mm	630	630	630	630	630
	W	mm	700	700	700	700	700
	D	mm	225	225	225	225	225
Net Weight	kg	16.1	16.1	16.1	17.4	17.4	17.4
Air Flow Rate (HH2/HH1/Hi/Me/Lo/Slo)	m ³ /h	360/342/318 /306/282/270	444/420/384 /360/336/318	480/444/420 /384/360/336	492/456/408 /372/342/318	540/510/468 /432/396/384	606/582/540 /510/474/438
Motor Power	W	10	11	12	14	18	23
Piping Connections	Flare-nut Connection (with Flare Nuts)						
Liquid Line	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
Gas Line	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7	Φ12.7
Condensate Drain	mm	Outer Diameter Φ18					
Cabinet Color	Pure White						
Packing Volume	m ³	0.18	0.18	0.18	0.18	0.18	0.18

NOTES:

1.The nominal cooling capacity and heating capacity are based on following conditions:
Cooling Operation Conditions
Indoor Air Inlet Temperature: 27°C DB(80°F DB), 19.0°C WB(66.2°F WB)
Outdoor Air Inlet Temperature: 35°C DB(95°F DB)
Piping Length: 7.5 Meters Piping Lift: 0 Meter
Heating Operation Conditions
Indoor Air Inlet Temperature: 20°C DB(68°F DB)
Outdoor Air Inlet Temperature: 7°C DB(45°F DB), 6°C WB(43°F WB)

2.The sound pressure level is based on following conditions:
It is measured in anechoic room. Operation noise differs with operation and ambient conditions.
Location of Microphone:

